


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
⤴	ADDED FULL RADIUS FOR COVER RETAINER POSTS ADDED RED PAINT FOR POLARITY ID	10JAN07

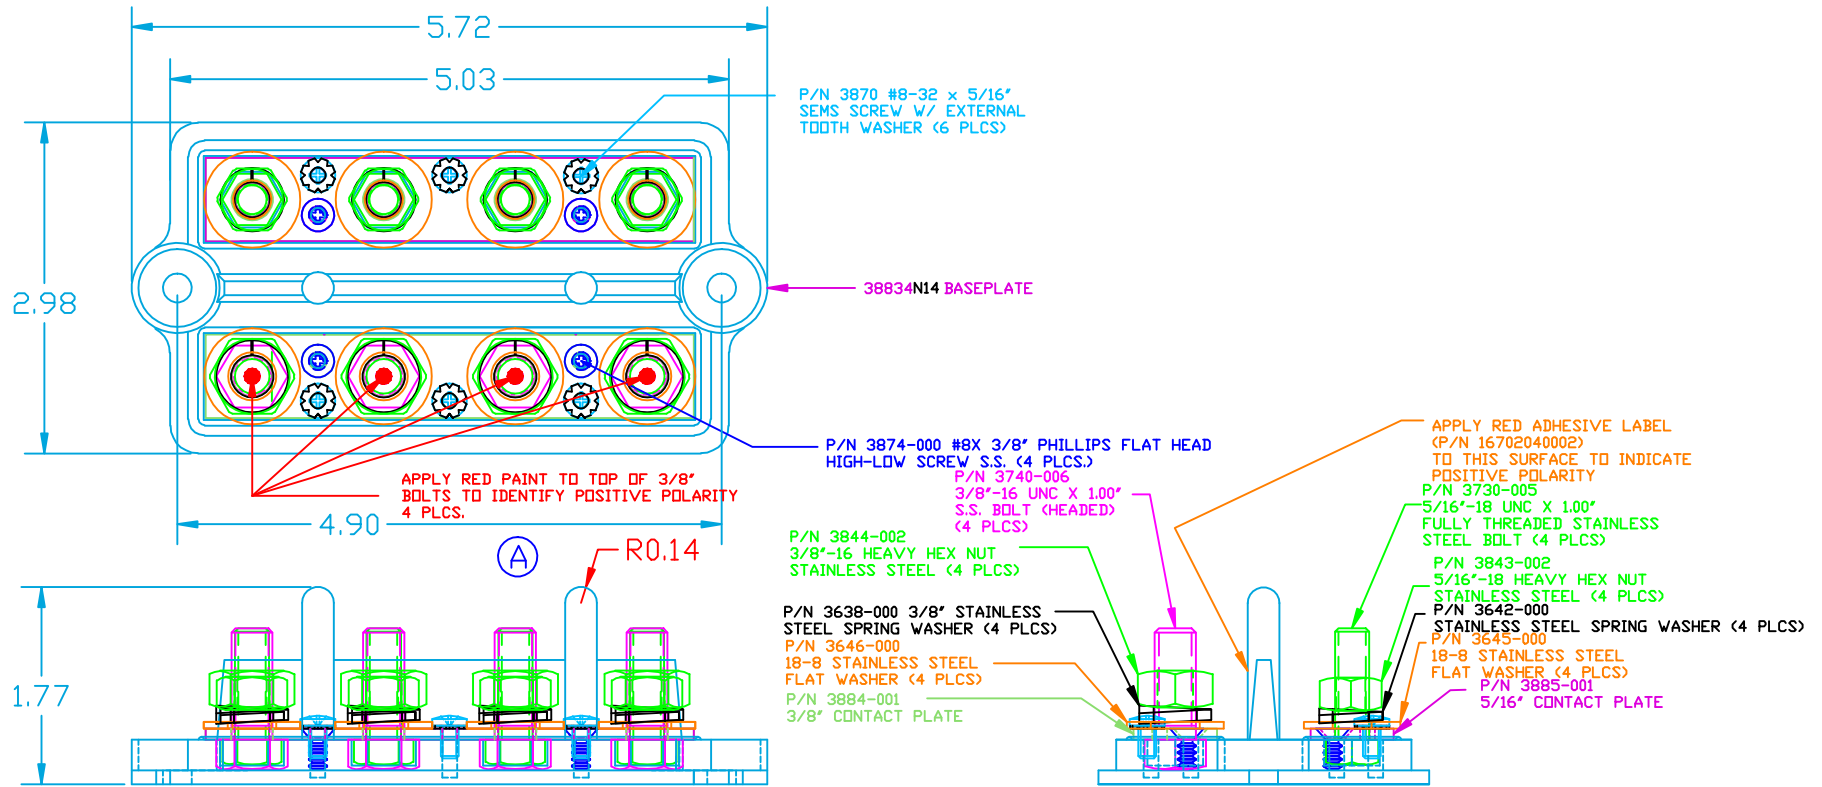

TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.30^\circ / \pm 0.8\text{mm}$   
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE


**DO NOT SCALE**

MAXIMUM RECOMMENDED FASTENER TORQUE(S):  
 5/16" STUDS: 12 FT./LBS. (144 IN./LBS.)  
 3/8" STUDS: 15 FT./LBS. (180 IN./LBS.)

MAXIMUM RECOMMENDED CURRENT:  
 250 AMPS TOTAL @ 12 VDC

BASE MATERIAL:  
 BASE MATERIAL U.L. RATING:

GLASS-REINFORCED NYLON  
 94 HB



**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: *****	DATE: 24OCT06	DRN BY: BRH	WEIGHT: .86 Lb. / 389.2 G.
TITLE: 5/16" AND 3/8" DUAL 4- PIN BUS			SCALE:
MATERIAL:		PART NO. 738834N0 N14	
COLOR: *****	DRG CLASS *****		