



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	3844-003 WAS 3844	16JUN06
B	3874-000 WAS 3873-000	12JUL06
C	3842-001 WAS 3842-002	14AUG06

P/N 31225 N02 BASEPLATE
MATERIAL: 16% GLASS FILLED NYLON
(RED AND BLACK VERSIONS)

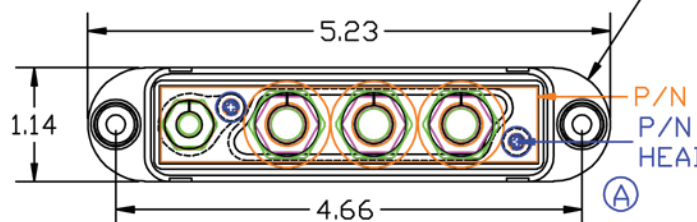

P/N 3884-000 NICKEL PLATED COPPER CONTACT PLATE
P/N 3874-000 #8 X 3/8" PHILLIPS FLAT
HEAD HIGH-LOW SCREW (2 PLCS)

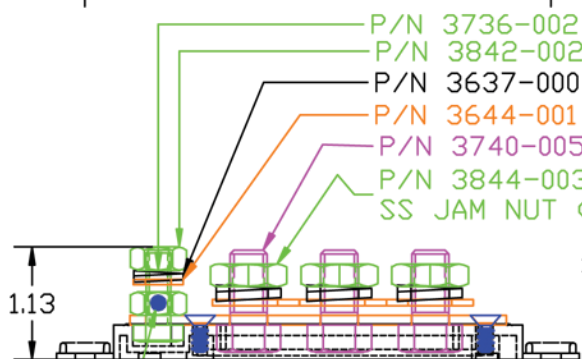

P/N 3736-002 1/4"X3/4" SS HEX HEAD BOLT
P/N 3842-002 1/4"-20 HEAVY HEX SS NUT
P/N 3637-000 1/4" SS SPRING WASHER
P/N 3644-001 1/4" SS FLAT WASHER
P/N 3740-005 3/8"X3/4" SS HEX HEAD BOLT (3 PLCS)
P/N 3844-003 3/8-16 HEAVY HEX
SS JAM NUT (3 PLCS)
P/N 3638-000 3/8" SS
SPRING WASHER (3 PLCS)
P/N 3646-000 3/8" SS
FLAT WASHER (3 PLCS)


P/N 3842-001 1/4"-20 TIN-PLATED
BRASS HEAVY HEX NUT
APPLY BLUE MARK AT ASSEMBLY TO
SIGNIFY CONDUCTIVE NUT

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS ONLY: ±.030"/±0.8mm
HARDWARE ITEMS: ±0.010"/±0.25mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

DO NOT SCALE

MAXIMUM AMPERAGE: 210 AMPS @12VDC
RECOMMENDED MAXIMUM FASTENER TORQUE: 3/8"-16 - 180 IN./LBS.
1/4"-20 - 60 IN./LBS.

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: *****	DATE: 20JAN06	DRN BY: BRH	WEIGHT: *****
TITLE: 3/8" 4- POINT CONTACT PLATE			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	7704N0 N02	